



LINKING CONVEYOR (500 & 1000 mm)

Features

- Modular design
- Stability enhanced by 'robust design'
- Laser carved stainless steel side guides for superior quality and durability
- Ergonomically designed arm rest
- Smooth and parallel width adjustment
- Multi-zone concept available upon request
- Different lengths available upon request
- SMEMA compatible
- Patented (SG Patent No.: 91261)

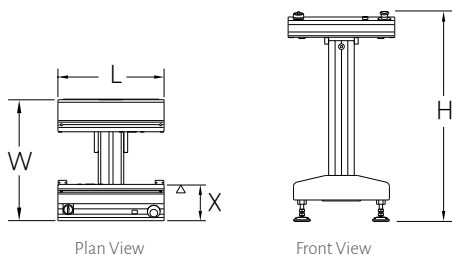

Legend
△: Fixed Point

| SPECIFICATIONS | |
|--------------------------|--|
| Description | This unit is used to link between SMD machines or board handling units. Belt |
| Conveyor Concept | |
| Conveyor Speed | 14 m/min. or specify |
| Power Source | 100, 230VAC 1Ph |
| Power Consumption | 100VA max. |

| Size | Model No. | Machine Dimension (mm) L x W x H | Fixed Point to Front Dimension (X) | Weight (Approximately) |
|------|-----------|----------------------------------|------------------------------------|------------------------|
| M | NTM0401-M | 500 x 570 x 985 | 168 mm | 45 kg |
| L | NTM0401-L | 500 x 727 x 985 | 168 mm | 50 kg |
| M | NTM0401-M | 1000 x 570 x 985 | 168 mm | 60 kg |
| L | NTM0401-L | 1000 x 727 x 985 | 168 mm | 70 kg |