



PCB REJECT CONVEYOR

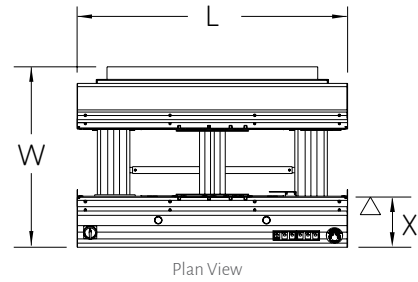

Legend
 △: Fixed Point

Features

- User friendly 'soft touch' LED membrane control panel
- Includes 'reject', 'inspect' and 'pass through' modes
- Modular design
- Stability enhanced by 'robust design'
- Ergonomically designed arm rest
- Smooth and parallel width adjustment
- Different lengths available upon request
- Variable speed control
- SMEMA compatible
- Patented (SG Patent No.: 91261)

SPECIFICATIONS

| SPECIFICATIONS | |
|--------------------------|------------------------------------------------------------------------------------------|
| Description | Faulty boards can be lifted up for visual inspection without interrupting the PCBs flow. |
| Conveyor Concept | Belt |
| Conveyor Speed | 0.5 - 14 m/min. or specify |
| Power Source | 100, 230VAC 1Ph |
| Power Consumption | 150VA max. |
| Air Consumption | 10 ltr/min. max. |

| Size | Model No. | Machine Dimension (mm) L x W x H | Fixed Point to Front Dimension (X) | Weight (Approximately) |
|------|-----------|----------------------------------|------------------------------------|------------------------|
| M | NTM2500-M | 1000 x 667 x 980 | 186 mm | 80 kg |
| L | NTM2500-L | 1000 x 824 x 980 | 186 mm | 90 kg |