


|                                                                      |
|----------------------------------------------------------------------|
| REV. Status                                                          |
| REVISION –<br>01/11/91 HA                                            |
| REVISION A<br>FLIPPED RADII<br>& CLARIFIED<br>MARKING<br>06/24/05 YS |
| REVISION B<br>RoHS COMPLIANT<br>11/03/05 MP                          |

- A. Electrical specification (@ 25°C)
- Power rating;  
500 mW
  - Dielectric strength;  
500 VAC 1 minute
  - Insulation resistance;  
10,000 MΩ MIN @ 500 VDC
  - Turns ratio;  
(1–5) : (6–2) = 2 : 1.00 ±5%  
(1–3) : (6–4) = 2 : 1.00 ±5%
  - Primary open circuit inductance;  
2000 μH MIN @ 1 KHz, 40 mV (1–5)
  - Primary ET–constant  
16.0V– μs MIN
  - Rise time;  
11.0 ns MAX
  - Interwinding capacitance between Primary and Secondary;  
19.0 PF MAX @ 100 KHz
  - Primary leakage inductance wih shorted Secondary;  
1.8 μH MAX @ 100 KHz
  - DC Resistance;  
Primary (1–5) 2.5 Ω MAX  
Secondary (2–6) 1.4 Ω MAX
- B. Marking;  
G512, TAM, date code and country of origin
- C. Schematic diagram



PIN 1 Designation


"TAM" and country of origin (molded)





MODEL NUMBER

G512

Date code

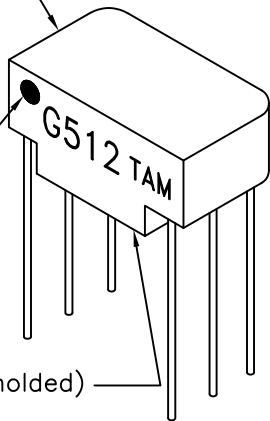

D. Mechanical Specification

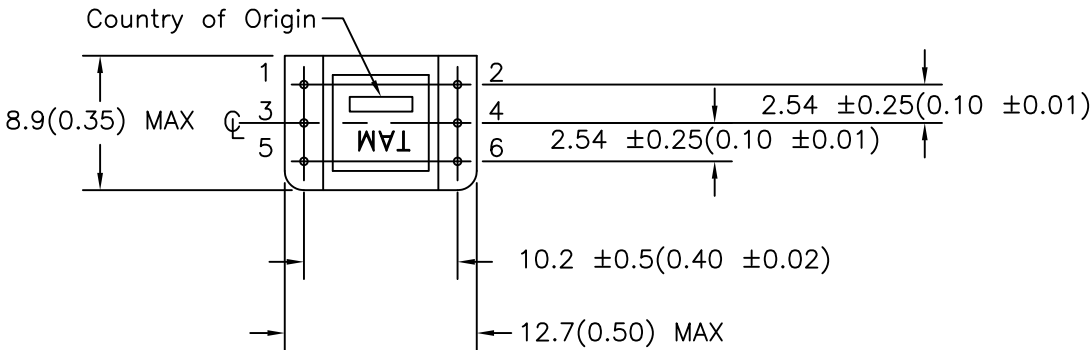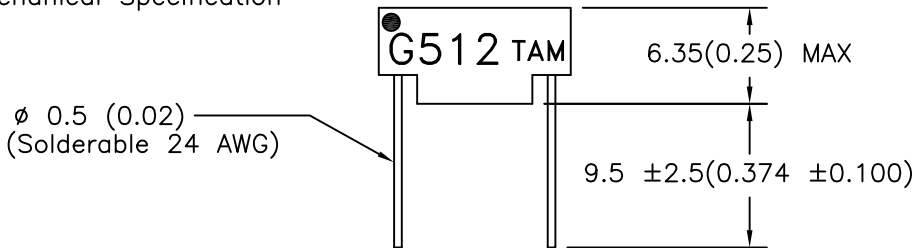

PREPARED BY:  
K. BRENNAN

|                            |                                                                                                                                                                                                                                                                                                                                                                                                    |          |                                           |                                 |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------|---------------------------------|
| ENGINEER:<br>M. PITCHAI    | DRAWING CONTROL NO.<br>P-A1-10350                                                                                                                                                                                                                                                                                                                                                                  | REV<br>B | MODEL DESCRIPTION<br>PULSE<br>TRANSFORMER | MODEL SPECIFICATION<br>G512     |
| SAFETY ENGINEER<br>T. CLEM | CONTENTS OF THIS DRAWING ARE<br>SUBJECT TO CHANGE WITHOUT<br>PRIOR NOTICE                                                                                                                                                                                                                                                                                                                          |          |                                           | DIM: mm[In] SCL: 2/1 SH: 1 OF 1 |
| APPROVED:<br>Y. SEKIGUCHI  | PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA<br>RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN<br>CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING. |          |                                           |                                 |